

XR1255 Roller Boom

Technical Specifications

XTREME
MANUFACTURING

Capacity: 12,000 lbs
Lift Height: 55'
Forward Reach: 38'
Power Shift Transmission
World Class 360° Visibility



Heavy Duty Rollers
for Long Life and Low
Maintenance



Dual Hydraulic
Cylinders for Precision
Fork Leveling

XTREME

TELEHANDLERS

10-5-3-2
WARRANTY


1415 W. Bonanza Rd., Las Vegas, NV 89106
www.XtremeManufacturing.com

(702) 636-2969
(800) 497-1704

Performances

	Capacity	12,000 lbs
	Lift Height	55'
	Forward Reach	38'
	Frame Leveling L/R	11°
	Operating Weight	35,700 lbs

Power Train

	Engine	Perkins 122 hp Tier 3
	Fuel Capacity	72 gal
	Transmission	Carraro 4-Speed
	Axle	Carraro
	Brakes	Inboard Wet Disc
	Parking Brake	SAHR







Tires

	Tires (Standard Eq)	Foamed Filled 15.5 x 25 E3
---	---------------------	-------------------------------















Hydraulics

	GPM	49
	PSI	3,500
	Hydraulic Oil Capacity	45 gal

Dimensions

	Length to fork face	25'
	Width	101"
	Height	7'11"
	Wheel Base	141"
	Ground Clearance	16.5"
	Turning Radius	14'

Standard Equipment


	Heavy-duty Frame/Chassis and Roller Boom
	Melonite Pins and Rollers
	Auxiliary Hydraulics
	Direct Dual Control Hydraulic Valve Actuation
	Robust Wiring, No Spades, No Pins
	Rear Axle Stabilization (RAS)
	Center Inline Engine Drive Train
	Full-time Planetary 4-Wheel Drive
	Steering - 4-Wheel Circle, Crab, 2-Wheel Front
	Back-Up Alarm
	Open ROPS
	Suspension Seat
	Quick Attach (Common Fit)
	Xtreme Service Accessibility

Attachments

	Standard Carriage - 72" or optional 48"
	+ 10° Side Tilt Carriage - 48"
	+ 45° Swing Carriage - 52" or 72"

XR1255 LOAD CHART - Outriggers Lowered

Standard Fork Carriage / Foam Filled Tires

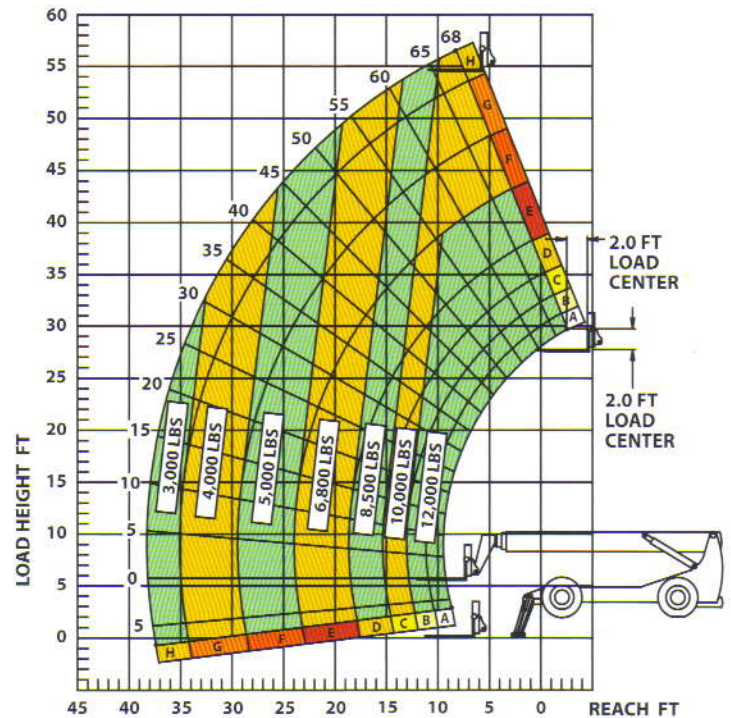

- Pallet Forks - 2.25" x 4" x 48"
- Lumber Forks - 1.75" x 7" x 60"
- Block Forks - 2" x 2" x 48"
- Utility Bucket - 1.25 cu yd
- Concrete Hopper - 0.5 cu yd, or 1.00 cu yd
- Truss Boom - 12' or 15'
- Wallboard/Sheet Material Handler
- Fork Position Carriage
- Grapple

Accessories and Options

-  Cab Enclosed
-  Limited Slip Differential
-  15.5 x 25 G2 Tires
-  A/C
-  4th Steer Mode, Rear Pivot
-  Work Light Package
-  Rotating Beacon
-  Pintle Hook
-  Running lights, brake & turn signals
-  13/14x34 Xtreme Tire

Long-Life Rollers



Xtreme 360° Visibility



Operator Controls



Boom Angle Indicator



Constant improvement and engineering progress make it necessary that we reserve the right to make specification, equipment and price changes without notice.

(702) 636-2969
(800) 497-1704

1415 W. Bonanza Rd., Las Vegas, NV 89106
www.XtremeManufacturing.com